



KORAMONT[®]

Fixing and Mounting of
RADIK and KORALUX radiators



A quick access to most recent information

Read us in your mobile phone



You can view our offer also in your mobile phone. You just need to scan the **QR code** with the **QR reader** on your mobile phone. You will then be able to view the complete range of our KORAMONT products on your mobile phone, including the overview of models, technical parameters and photo gallery.

The new plant KORADO is the most modern factory for the production of radiators in Europe thanks to its up-to date production facility, technology and organization. Its modern and sophisticated organization in the area of 30 000 m² enables further increases of production capacity whenever needed.

The choice of all technology was driven by the maximum effort to ensure environment protection inside the factory as well as in its surroundings.

KORADO, a.s. obtained the ISO 9001 quality certificate in 1997 and currently already holds the ISO 9001:2008.





KORAMONT® TABLE OF CONTENTS


FIXING OF RADIK STEEL PANEL RADIATORS - WALL BRACKETS	4
FIXING OF RADIK STEEL PANEL RADIATORS - STAND BRACKETS	7
FIXING OF RADIK STEEL PANEL RADIATORS - DRILL-IN BRACKETS	10
FIXING OF KORALUX TOWEL RAIL RADIATORS - WALL BRACKETS	12
MOUNTING OF RADIK STEEL PANEL RADIATORS - DATA FOR FIXING	15
SUMMARY OF FIXING TECHNOLOGY FOR RADIK RADIATORS	16
MOUNTING OF RADIK STEEL PANEL RADIATORS - MOUNTING TEMPLATE	18




KORAMONT® FIXING OF RADIK STEEL PANEL RADIATORS

WALL BRACKETS

Simple wall bracket

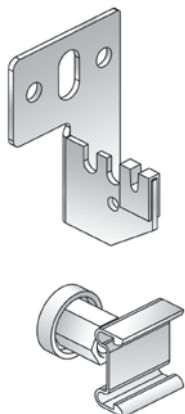


- designed for all models and types with welded fixing hangers except for type 10 of all RADIK models
- selection not dependent on the height of the radiator **H**
- zinc-coated metal parts
- enables mounting on the wall at a distance of **D = 40 mm** from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **500 N**

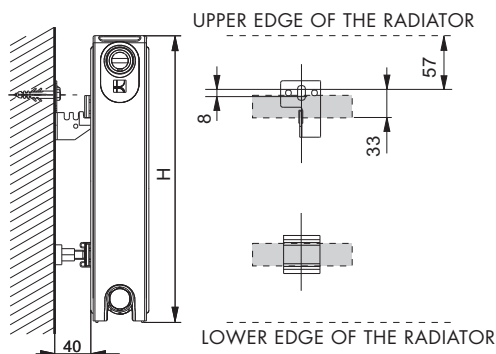


Set contains: 2 x bracket, 2 x support, screws 8 x 60mm, dowel plugs Ø 10 mm

Type	H [mm]	Order number
Simple wall bracket	300÷900	Z-U320

Simple wall bracket - angled

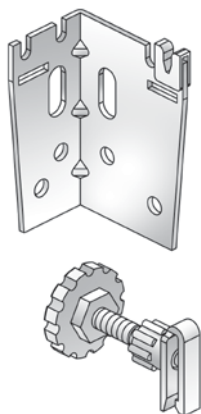

- designed for all models and types with welded fixing hangers
- selection not dependent on the height of the radiator **H**
- zinc-coated metal parts
- enables mounting on the wall at a distance of **D = 54 and 36 mm** from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **700 N**

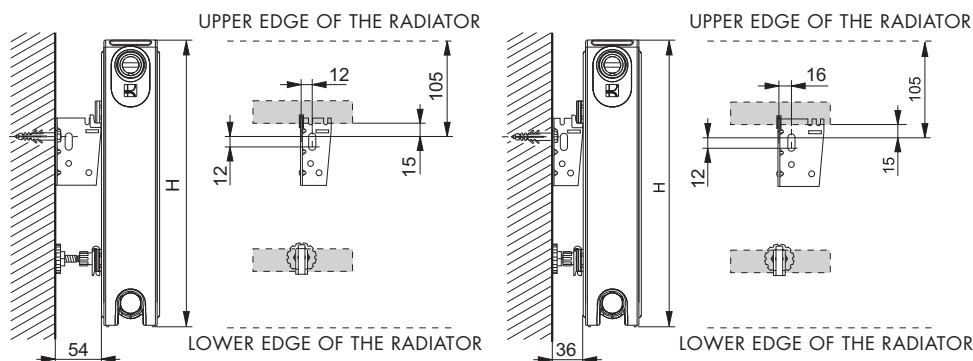

Set contains: 1 x right and left bracket, 2 x support, screws 8 x 60mm, dowel plugs Ø 10 mm

Type	H [mm]	Order number
Simple wall bracket - angled	300÷900	Z-U300




KORAMONT® FIXING OF RADIK STEEL PANEL RADIATORS

WALL BRACKETS

Double wall bracket



- designed for all models and types with welded fixing hangers except for type 10 of all models in the VENTIL KOMPAKT and PLAN VENTIL KOMPAKT version
- selection dependent on the height of the radiator **H**
- metal parts painted in white
- enables mounting on the wall at a distance of **D = 43 and 23 mm** from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **1100 N**

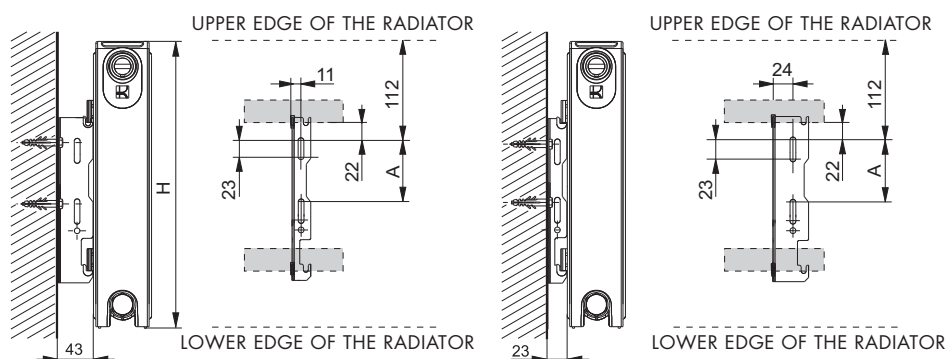


Set contains: 1 x right and left bracket, screws 6 x 50mm, dowel plugs Ø 8 mm

Type	H [mm]	A [mm]	Order number
Double wall bracket	300	-	ZU562
	400	141	ZU563
	500	241	ZU564
	600	341	ZU565
	900	641	ZU566

Compact bracket



- designed for all models and types with welded fixing hangers except for type 10 of all models in the VENTIL KOMPAKT and PLAN VENTIL KOMPAKT version
- selection dependent on the height of the radiator **H**
- zinc-coated metal parts
- equipped with a safety catch to prevent the radiator from lifting
- enables mounting on the wall at a distance of **D = 43 mm** from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **1200 N**

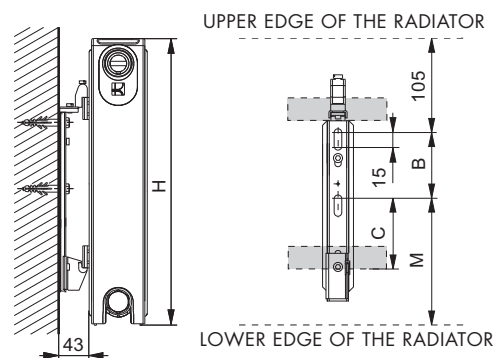

Set contains: 2 x bracket, screws 8 x 60 mm, dowel plugs Ø 10 mm


Type	H [mm]	B [mm]	C [mm]	M [mm]	Order number
Compact bracket	300	-	130	195	ZU571
	400	145	85	150	ZU572
	500	245	85	150	ZU573
	600	345	85	150	ZU574
	900	645	85	150	ZU575




KORAMONT® FIXING OF RADIK STEEL PANEL RADIATORS

WALL BRACKETS

Split bracket Plus

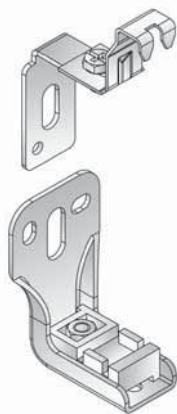

- designed mainly for the models without welded fixing hangers, RADIK VKU model, all models with height 200mm and RADIK RC version
- can be used also for all other radiator models and types with welded hangers except for types 10 and 11 of all models
- for radiators 1800 mm long and longer it is necessary to use three brackets, the third one shall be located in the middle of the radiator length
- selection not dependent on the radiator height **H**
- zinc-coated metal parts, top grill holder painted in white
- secures the radiator against lifting
- enables mounting on the wall at a distance of **D = 37÷47** mm from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **1000 N**

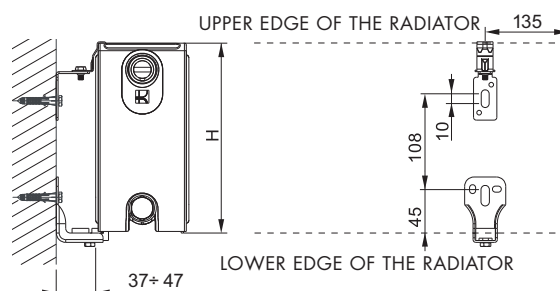


Set contains: 2 x bracket (Z-U556) or 3 x bracket (Z-U557), screws 8 x 60 mm, dowel plugs Ø 10 mm

Type	H [mm]	Set contains	Order number
Split Bracket Plus – set 2 pcs	200÷900	2pcs	Z-U556
Split Bracket Plus – set 3 pcs	200÷900	3pcs	Z-U557

Compact bracket Plus



- designed mainly for radiators without welded fixing hangers - model RADIK VKU and RADIK RC version
- can be also used for all other models and types with welded fixing lugs except for type 10 and 11 of all models
- for radiators 1800 mm long and longer, you must use three brackets, the third is positioned in the middle
- selection dependent on the height of the radiator **H**
- zinc-coated metal parts, grill holder painted in white
- equipped with a safety catch to prevent the radiator from lifting
- enables mounting on the wall at a distance of **D = 30** mm from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **1200 N**

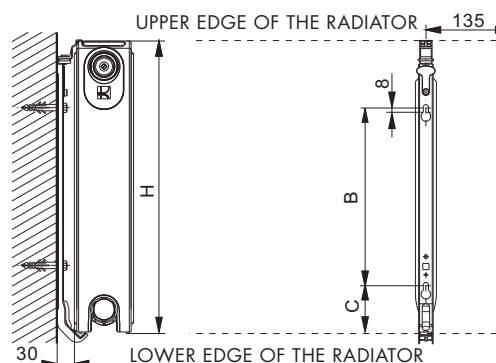

Set contains: 2 x bracket, screws 8 x 60 mm, dowel plugs Ø 10 mm

Note: Maximum permitted horizontal load on the bracket in transverse direction (perpendicularly to the wall) is **220 N**

Type	H [mm]	B [mm]	C [mm]	Order number
Compact bracket Plus	300	82	114	Z-U551
	400	182	114	Z-U552
	500	282	114	Z-U553
	600	382	114	Z-U554
	900	682	114	Z-U555




KORAMONT® FIXING OF RADIK STEEL PANEL RADIATORS

Split bracket VERTIKAL



- designed mainly for panel radiators RADIK and design radiators KORATHERM with welded fixing hangers and with minimum height **H = 500 mm**
- zinc-coated metal parts
- equipped with a safety catch to prevent the radiator from lifting and move
- enables mounting on the wall at a distance of **D = 40 mm** from the wall
- used for concrete structures and masonry from porous concrete and solid bricks
- maximum permitted vertical load on the bracket is **1500 N**

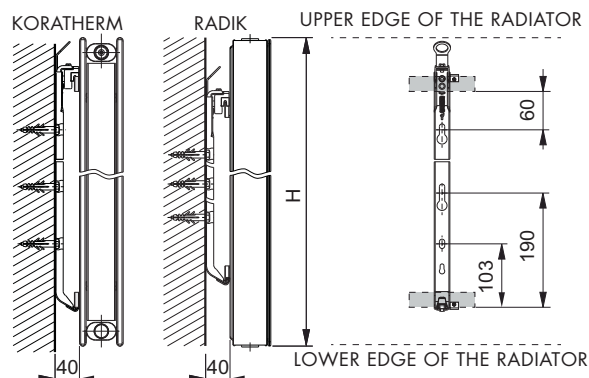


Set contains: 2 x brackets, screws 7 x 60 mm, dowel plugs Ø 10 mm, 4 x safety catch against lifting and move

Note: Maximum permitted horizontal load on the bracket in longitudinal and transverse direction is **250 N**


Type	H [mm]	Order number
Split bracket VERTIKAL	minimum 500	ZU558

STAND BRACKETS

Internal stand bracket – universal



- designed for all models except for models RADIK VKM and RADIK COMBI VK
- suitable for all types except for type 10
- radiator panel and convactor fins are used for fixing the radiator
- assembled by manufacturer
- selection not dependent on the height of the radiator **H**
- metal parts painted in white
- maximum permitted vertical load on the bracket is **1800 N**

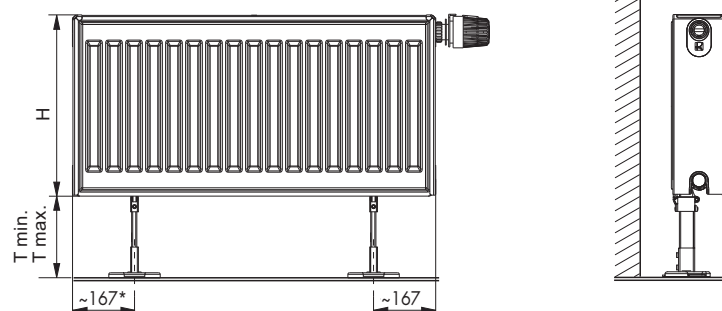

*100 mm is valid for radiator
L = 400 mm

Set contains: 1 x bracket

RADIK - number of brackets Z-U331				
Height H = 300 ÷ 600		Height H = 900		
Lenght L	Number of brackets	Lenght L	Number of brackets	
400 ÷ 1600	2	400 ÷ 1200	2	
1800 ÷ 2300	3	1400 ÷ 1800	3	
2600 ÷ 3000	4	2000	4	


Type	H [mm]	T min [mm]	T max [mm]	Order number
Internal stand bracket – universal	300	150	150	Z-U331
	400÷900	100		




KORAMONT® FIXING OF RADIK STEEL PANEL RADIATORS

STAND BRACKETS

External stand bracket



- designed for all models and types except for models RADIK VKU, RADIK VKM type 10 and RADIK RC version
- welded fixing hangers are used for fixing the radiator
- ordering requires 2 separate items (set + load-bearing profile) and their assembly when fixing the radiator
- selection of the load-bearing profile is dependent on the height of the radiator **H**
- visible metal parts painted in white, other parts zinc-coated
- maximum permitted vertical load on the bracket is **1000 N**

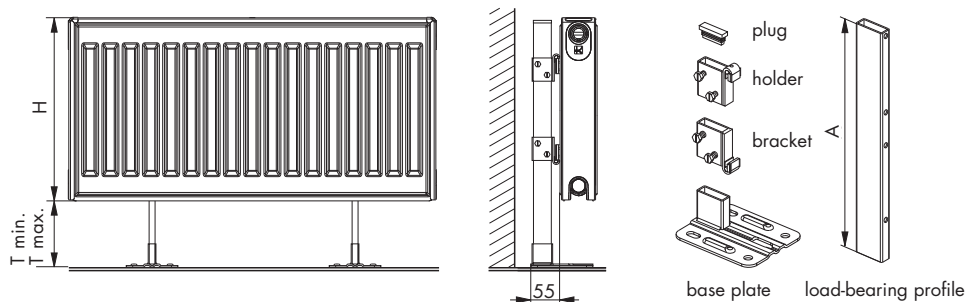


Set contains: 1 x base plate, bracket, holder and plug


Note: modification of the length of the load-bearing profile can allow you to achieve different T_{min} and T_{max} values

Type	H [mm]	A [mm]	T min [mm]	T max [mm]	Order number
External stand bracket	300÷900	-	-	-	Z-U210
Load-bearing profile	300	460	170	270	Z-U220
Load-bearing profile	400	560	170	270	Z-U230
Load-bearing profile	500	660	170	270	Z-U240
Load-bearing profile	600	760	170	270	Z-U250
Load-bearing profile	900	1060	170	270	Z-U260

Stand brackets RADIK for types 22 and 33



- designed for all models except for model RADIK COMBI VK
- designed for models 22, 33 and models 20S, 30 HYGIENE and CLEAN
- radiator panels are used for fixing the radiator
- assembled by manufacturer
- use up to a height of $H_{max} = 600$ mm
- metal parts painted in white
- maximum permitted vertical load on the bracket is **1500 N**

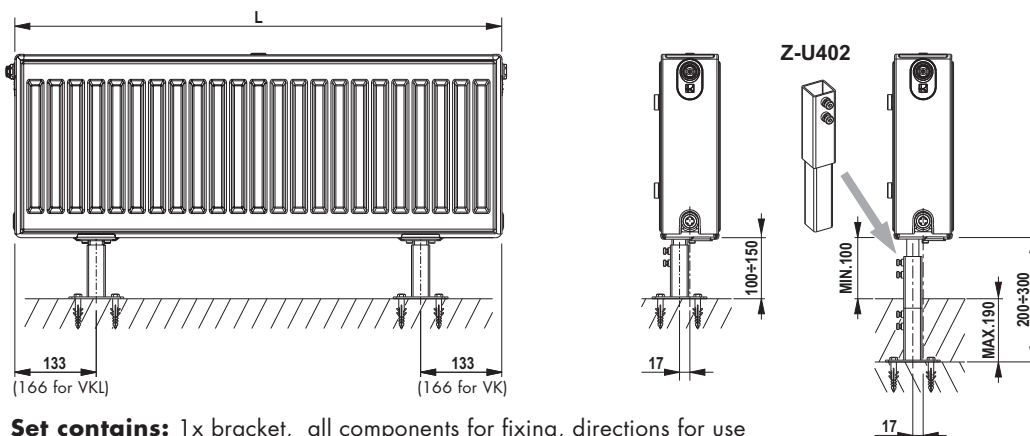

Set contains: 1x bracket, all components for fixing, directions for use

RADIK - number of brackets Z-U401				
Height H = 200÷600				
Lenght L	400÷1600	1800÷2300	2600÷3000	
Number of brackets	2	3	4	
Type	H [mm]	T min [mm]	T max [mm]	Order number
Stand brackets RADIK for types 22 and 33	200 ÷ 600	100	150	Z-U401






KORAMONT® FIXING OF RADIK STEEL PANEL RADIATORS

STAND BRACKETS

Stand bracket for types 22 and 33


- designed for all models except for model RADIK COMBI VK
- radiator panel and convector fins are used for fixing the radiator
- assembled by manufacturer – a part of the bracket is the extension segment
- selection not dependent on the radiator height **H**
- metal parts painted in white
- maximum permitted vertical load on the bracket is **1800 N**

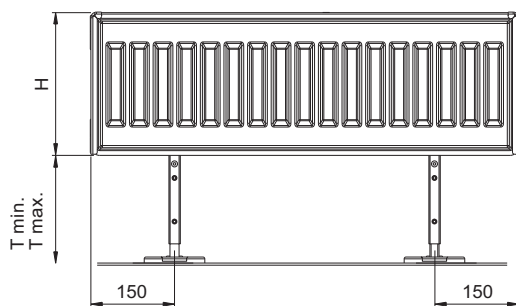


Set contains: 1 x bracket

Type	H [mm]	T min [mm]	T max [mm]	Order number
Stand bracket for types 22 and 33	200÷900	165	320	Z-U400


Accessories for stand brackets




Cover for the base plate for the external bracket Z-U210




Cover for the base plate for the internal bracket - universal Z-U331



Cover for the load-bearing profile



Extension piece for stand brackets RADIK and KORATHERM



Cover for stand brackets RADIK Z-U401


Type	Packing	Order number
Cover for the base plate for the external bracket	1 pc	Z-U440
Cover for the base plate for the internal bracket	1 pc	Z-U450
Cover for the load-bearing profile	1 pc	Z-U460
Cover for stand brackets RADIK Z-U401	1 pc	Z-U582
Extension piece for stand brackets RADIK and KORATHERM	1 pc	Z-U402




KORAMONT® FIXING OF RADIK STEEL PANEL RADIATORS

DRILL-IN BRACKETS

Drill-in bracket 15/120




- designed for all models and types with welded fixing hangers except for type 10 of all models in the VENTIL KOMPAKT and PLAN VENTIL KOMPAKT version
- selection not dependent on the height of the radiator **H**
- zinc-coated metal parts
- enables mounting on the wall at a distance of **D = 48 mm** from the wall
- used for masonry from perforated and solid bricks and porous concrete
- \varnothing 15 mm drill must be used for drilling into the wall
- maximum permitted vertical load on the bracket is **700 N**

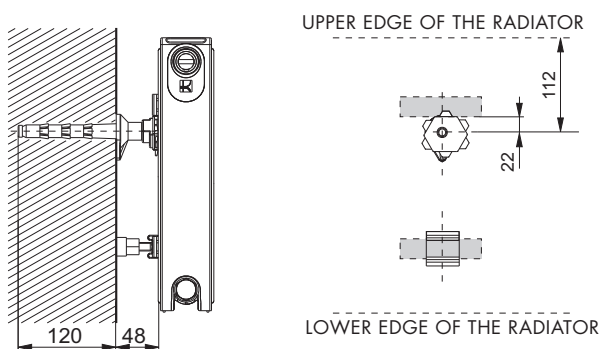


Set contains: 1 x bracket, 1 x support

Type	H [mm]	Order number
Drill-in bracket 15/120	300÷900	Z-U140

Drill-in bracket 15/100/70



- designed mainly for type 10 of all models with welded fixing hangers
- selection not dependent on the height of the radiator **H**
- zinc-coated metal parts
- enables mounting on the wall at a distance of **D = 70 mm** from the wall
- used for masonry from perforated and solid bricks and porous concrete
- \varnothing 15 mm drill must be used for drilling into the wall
- maximum permitted vertical load on the bracket is **400 N**

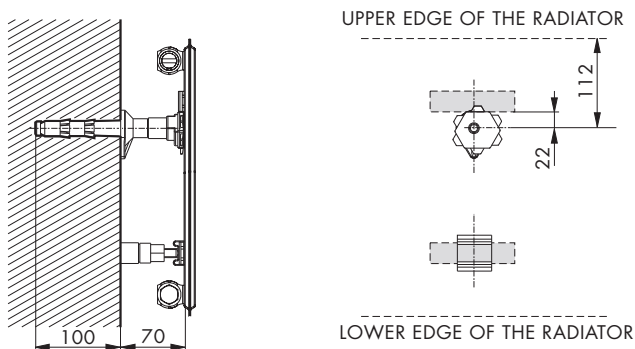

Set contains: 1 x bracket, 1 x support


Type	H [mm]	Order number
Drill-in bracket 15/100/70	300÷900	Z-U141





KORAMONT® FIXING OF RADIK STEEL PANEL RADIATORS

DRILL-IN BRACKETS

Drill-in bracket 18/120



- designed for all models and types with welded fixing hangers, above all for the HYGIENE version (all RADIK HYGIENE and RADIK CLEAN models)
- selection not dependent on the height of the radiator **H**
- zinc-coated metal parts
- the set enables mounting on the wall at a distance of **D = 35 ÷ 65 mm** from the wall, at a distance of **D = 65 ÷ 80 mm** a bracket must also be used on the lower pair of fixing hangers (not a support)
- used for masonry from perforated and solid bricks and porous concrete
- \varnothing 18 mm drill must be used for drilling into the wall
- maximum permitted vertical load on the bracket is **1000 N** at **D = 50 mm**





Set contains: 2 x bracket, 2 x support

Type	H [mm]	Order number
Drill-in bracket 18/120	300÷900	Z-U144

Drill-in bracket 18/110/100



- designed for all models and types with welded fixing hangers, above all for the HYGIENE version (all RADIK HYGIENE and RADIK CLEAN models)
- selection not dependent on the height of the radiator **H**
- zinc-coated metal parts
- the set enables mounting on the wall at a distance of **D = 100 mm** from the wall
- used for masonry from perforated and solid bricks and porous concrete
- \varnothing 18 mm drill must be used for drilling into the wall
- maximum permitted vertical load on the bracket is **500 N** at **D = 100 mm**



Set contains: 2 x bracket

* see page 15


Type	H [mm]	Order number
Drill-in bracket 18/110/100	300÷900	Z-U290

Universal drill-in bracket 15/120



- designed for a wide range of products - e.g. radiators, water tanks, etc.
- enables fixing to the wall
- zinc-coated metal parts
- used for masonry from perforated and solid bricks and porous concrete
- \varnothing 15 mm drill must be used for drilling into the wall
- maximum permitted vertical load on the bracket is **700 N**

Set contains: 1 x bracket




Type	Order number
Universal drill-in bracket 15/120	Z-U200




KORAMONT® FIXING OF KORALUX RADIATORS

WALL BRACKETS - MAX, COMFORT, CLASSIC

Wall brackets KORALUX MAX, COMFORT, CLASSIC - General information



- universal set designed for fixing of both radiators with straight tubes (LINEAR design) and with curved tubes (RONDO design) thanks to a special component (see position **1**)
- the set of wall brackets is delivered according to the model of radiator, in two colours - white or chrome
- set contains:
 - 4 x brackets
 - all components for fitting to the wall
 - air vent
 - blanking plug
- tubular radiator fixed to the wall at four points
- used for concrete structures and masonry from solid bricks
- in case of using a suitable type of a special dowel and a screw of the respective size it can also be used for other types of masonry

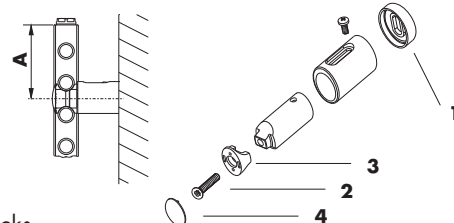


Wall brackets KORALUX MAX, COMFORT, CLASSIC - Fitting

- position the bracket between the second and third pipe from the top and the bottom (level **A**)
- carefully tighten the screw (position **2**) so the compressed part of the bracket is not deformed (position **3**) and the cover (position **4**) fits perfectly into the compressed part of the console
- we recommend the distance of the bracket centre on the wall from the side edge of the radiator according to the dimension **B**


Wall brackets KORALUX MAX, COMFORT, CLASSIC - Product range

- three versions of the mounting sets can be delivered
- the choice of the type of the bracket depends on distance between the tubes
 - **Mounting set Ø24/35** - designed for use with all models of KORALUX MAX towel rail radiators
 - **Mounting set Ø24/40** – designed for use with all models of KORALUX COMFORT towel rail radiators
 - **Mounting set Ø20/40** – designed for use with all models of KORALUX CLASSIC towel rail radiators

KLM, KLMM, KLC, KLCM, KLT, KLTM, KLME, KLCE, KLTE



KRM, KRMM, KRC, KRCE, KRT, KRTE, KRME, KRCE, KRTE



KLMM, KRMM, KLTM, KRTM, KLCM, KRCE - models with bottom middle connection with the connecting pitch 50 mm
KLME, KRME, KLTE, KRTE, KLCE, KRCE - electric radiators - not connected to the heating system

Mounting set Ø24/35 - MAX



Model	Name	Tube Diameter [mm]	A [mm]	B [mm]	C [mm]	D [mm]	b [mm]		
							L = radiator length [mm]		
LINEAR MAX	KLM	24	83	70	71÷88	15	-	-	-
LINEAR MAX-M	KLMM	24	83	70	71÷88	15	71÷88	71÷88	71÷88
LINEAR MAX-E	KLME	24	83	70	71÷88	15	-	-	-
RONDO MAX	KRM	24	83	85	65÷81	15	-	-	-
RONDO MAX-M	KRMM	24	83	85	65÷81	15	94÷110	100÷116	104÷120
RONDO MAX-E	KRME	24	83	85	65÷81	15	-	-	-

Information for ordering

Model	Name	Tube Diameter [mm]	Type of set	Colour	Order number
LINEAR MAX	KLM	24	Mounting set Ø24/35	white chrome	Z-U512 Z-U513
LINEAR MAX-M	KLMM	24			
LINEAR MAX-E	KLME	24			
RONDO MAX	KRM	24			
RONDO MAX-M	KRMM	24			
RONDO MAX-E	KRME	24			



KORAMONT® FIXING OF KORALUX RADIATORS

WALL BRACKETS - MAX, COMFORT, CLASSIC

Mounting set Ø24/40 - COMFORT



Model	Name	Tube Diameter [mm]	A [mm]	B [mm]	C [mm]	D [mm]	b [mm] L = radiator length [mm]		
							450/500	600	750
LINEAR COMFORT	KLT	24	90	70	73÷92	15	-	-	-
LINEAR COMFORT-M	KLTM	24	90	70	73÷92	15	73÷92	73÷92	73÷92
LINEAR COMFORT-E	KLTE	24	90	70	73÷92	15	-	-	-
RONDO COMFORT	KRT	24	90	85	67÷85	15	-	-	-
RONDO COMFORT-M	KRTM	24	90	85	67÷85	15	96÷114	103÷121	104÷122
RONDO COMFORT-E	KRTE	24	90	85	67÷85	15	-	-	-

Information for ordering

Model	Name	Tube Diameter [mm]	Type of set	Colour	Order number
LINEAR COMFORT	KLT	24	Mounting set Ø24/40	white chrome	Z-U594 Z-U595
LINEAR COMFORT-M	KLTM	24			
LINEAR COMFORT-E	KLTE	24			
RONDO COMFORT	KRT	24			
RONDO COMFORT-M	KRTM	24			
RONDO COMFORT-E	KRTE	24			

Mounting set Ø20/40 - CLASSIC



Model	Name	Tube Diameter [mm]	A [mm]	B [mm]	C [mm]	D [mm]	b [mm] L = radiator length [mm]		
							450	600	750
LINEAR CLASSIC	KLC	20	90	70	71÷90	15	-	-	-
LINEAR CLASSIC-M	KLCM	20	90	70	71÷90	15	71÷90	71÷90	71÷90
LINEAR CLASSIC-E	KLCE	20	90	70	71÷90	15	-	-	-
RONDO CLASSIC	KRC	20	90	85	64÷82	15	-	-	-
RONDO CLASSIC-M	KRCM	20	90	85	64÷82	15	93÷111	100÷118	104÷122
RONDO CLASSIC-E	KRCE	20	90	85	64÷82	15	-	-	-

Information for ordering

Model	Name	Tube Diameter [mm]	Type of set	Colour	Order number
LINEAR CLASSIC	KLC	20	Mounting set Ø20/40	white chrome	Z-U592 Z-U593
LINEAR CLASSIC-M	KLCM	20			
LINEAR CLASSIC-E	KLCE	20			
RONDO CLASSIC	KRC	20			
RONDO CLASSIC-M	KRCM	20			
RONDO CLASSIC-E	KRCE	20			




KORAMONT® FIXING OF KORALUX RADIATORS

WALL BRACKETS - STANDARD

Mounting set Ø20 universal - STANDARD



- designed for use with all models of KORALUX STANDARD towel rail radiators
- tubular radiator fixed to the wall at four points
- the set of wall brackets is delivered according to the model of radiator, in two colours - white or chrome
- used for concrete structures and masonry from solid bricks
- in case of using a suitable type of a special dowel and a screw of the respective size it can also be used for other types of masonry
- set contains:
 - 4 x brackets
 - all components for fitting to the wall
 - air vent
 - blanking plug

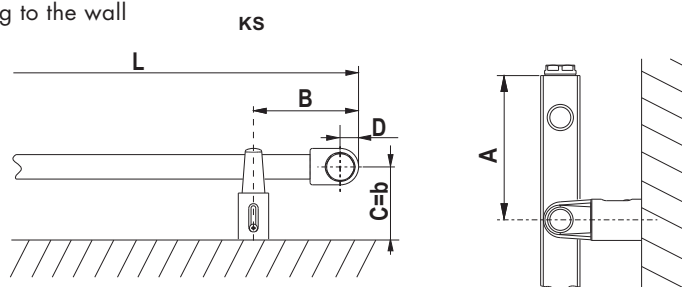


Model	Name	Tube Diameter [mm]	A [mm]	B [mm]	C [mm]	D [mm]
STANDARD	KS	20	110	70	72±81	15


Information for ordering

Model	Name	Tube Diameter [mm]	Type of set	Colour	Order number
STANDARD	KS	20	Mounting set Ø20	white chrome	Z-U588 Z-U589

Room divider set KORALUX



- designed for all KORALUX radiators
- tubular radiator is in position perpendicularly to the wall
- tubular radiator fixed to the wall at two points and to the floor at one point
- in two colours – white or chrome
- set contains:
 - 2 x wall brackets
 - 1 x stand bracket
 - all components for fitting

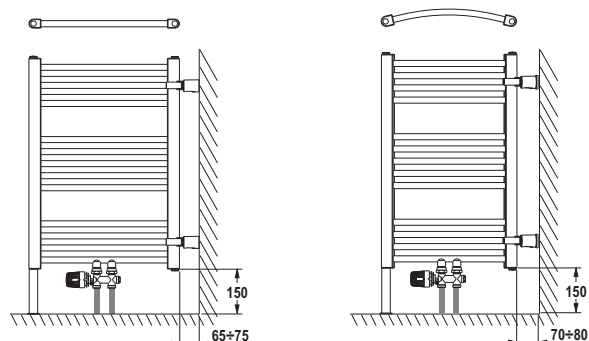


Model	Type of set	Colour	Order number
LINEAR CLASSIC, LINEAR CLASSIC - M, LINEAR CLASSIC - E	Room divider set KORALUX 40x30	white chrome	Z-U168 Z-U169
RONDO CLASSIC, RONDO CLASSIC - M, RONDO CLASSIC - E			
STANDARD			
LINEAR EXCLUSIVE - M, RONDO EXCLUSIVE - M	Room divider set KORALUX 41x35	white chrome	Z-U170 Z-U171
LINEAR COMFORT, LINEAR COMFORT - M, LINEAR COMFORT - E			
RONDO COMFORT, RONDO COMFORT - M, RONDO COMFORT - E			
LINEAR MAX, LINEAR MAX - M, LINEAR MAX - E			
RONDO MAX, RONDO MAX - M, RONDO MAX - E			



KORAMONT® MOUNTING OF RADIK STEEL PANEL RADIATORS

DATA FOR FIXING

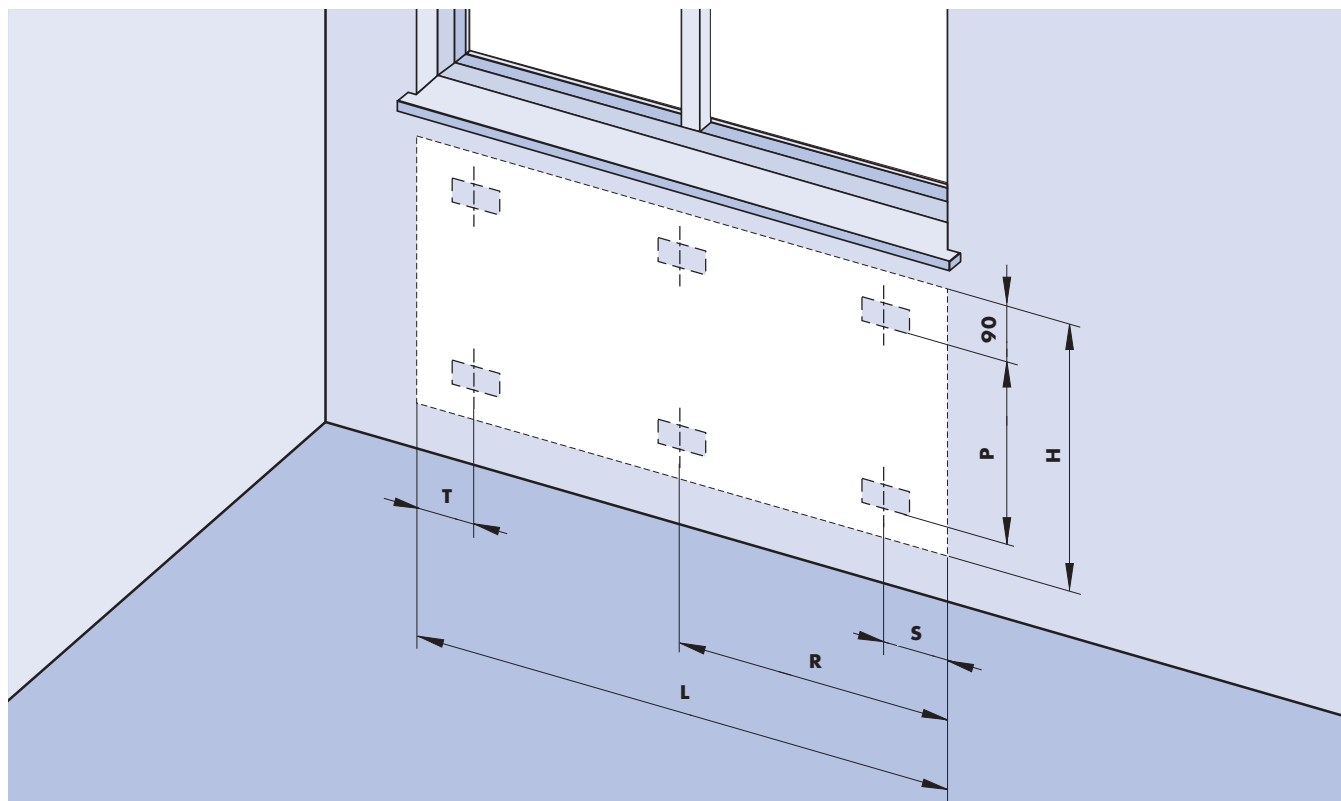

		Radiator length L [mm]						
	Type	400	500 ÷ 1600	1800	2000	2300	2600	3000
S [mm]	10, 20, 20S, 20 VK, 20 VKL, 20S VK, 21, 21 VK, 21 VKL, 22, 22 VK, 22 VKL, 22 COMBI VK, 30, 30 VK, 33, 33 VK, 33 VKL	133	133	133	133	133	133	133
	10 VK	167	167	167	167	167	167	167
	10 VKL	100	133	133	133	133	133	133
	11,11 VK, 11 VKL	117	150	150	150	150	150	150
T [mm]	10, 20, 20S, 20 VK, 20 VKL, 20S VK, 21, 21 VK, 21 VKL, 22, 22 VK, 22 VKL, 22 COMBI VK, 30, 30 VK, 33, 33 VK, 33 VKL	133	133	133	133	133	133	133
	10 VK	100	133	133	133	133	133	133
	10 VKL	167	167	167	167	167	167	167
	11,11 VK, 11 VKL	117	150	150	150	150	150	150
R [mm]	10, 20, 20S, 20 VK, 20 VKL, 20S VK, 21, 21 VK, 21 VKL, 22, 22 VK, 22 VKL, 22 COMBI VK, 30, 30 VK, 33, 33 VK, 33 VKL	-	-	900	1000	1133	1300	1500
	10 VK, 10 VKL	-	-	900	1000	1133	1300	1500
	11,11 VK, 11 VKL	-	-	833	983	1150	1283	1483

Notice:

PLAN KLASIK = HYGIENE = CLEAN = KLASIK - R = KLASIK

PLAN VK = HYGIENE VK = CLEAN VK = VKM = PLAN VKL = VK

PLAN 11 VKL = 11 VKL

H [mm]	300	400	500	554	600	900
P [mm]	145	245	345	399	445	745



KORAMONT® SUMMARY OF FIXING TECHNOLOGY RADIK®

			Model and type											
Type of bracket	Height H [mm]	Order number	KLASIK / PLAN KLASIK KLASIK - Z						VK / PLAN VK / VK - Z VKL / PLAN VKL					
			10	11	20	21	22	33	10	11	20	21	22	33
Simple wall bracket	300 ÷ 900	Z-U320	●	●	●	●	●	●	●	●	●	●	●	●
Simple wall bracket - angled	300 ÷ 900	Z-U300	●	●	●	●	●	●	●	●	●	●	●	●
Double wall bracket	300	Z-U562	●	●	●	●	●	●	●	●	●	●	●	●
	400	Z-U563	●	●	●	●	●	●	●	●	●	●	●	●
	500	Z-U564	●	●	●	●	●	●	●	●	●	●	●	●
	600	Z-U565	●	●	●	●	●	●	●	●	●	●	●	●
	900	Z-U566	●	●	●	●	●	●	●	●	●	●	●	●
Compact bracket	300	Z-U571	●	●	●	●	●	●	●	●	●	●	●	●
	400	Z-U572	●	●	●	●	●	●	●	●	●	●	●	●
	500	Z-U573	●	●	●	●	●	●	●	●	●	●	●	●
	600	Z-U574	●	●	●	●	●	●	●	●	●	●	●	●
	900	Z-U575	●	●	●	●	●	●	●	●	●	●	●	●
Compact bracket Plus	300	Z-U551	●	●	●	●	●	●	●	●	●	●	●	●
	400	Z-U552	●	●	●	●	●	●	●	●	●	●	●	●
	500	Z-U553	●	●	●	●	●	●	●	●	●	●	●	●
	600	Z-U554	●	●	●	●	●	●	●	●	●	●	●	●
	900	Z-U555	●	●	●	●	●	●	●	●	●	●	●	●
Split Bracket Plus	200 ÷ 900	Z-U556 Z-U557	●	●	●	●	●	●	●	●	●	●	●	●
Split bracket VERTIKAL	500 ÷ 2000	Z-U558	●	●	●	●	●	●	●	●	●	●	●	●
External stand bracket - set	300 ÷ 900	Z-U210	●	●	●	●	●	●	●	●	●	●	●	●
External stand bracket - load-bearing profile	300	Z-U220	●	●	●	●	●	●	●	●	●	●	●	●
	400	Z-U230	●	●	●	●	●	●	●	●	●	●	●	●
	500	Z-U240	●	●	●	●	●	●	●	●	●	●	●	●
	600 (554*)	Z-U250	●	●	●	●	●	●	●	●	●	●	●	●
	900	Z-U260	●	●	●	●	●	●	●	●	●	●	●	●
Stand brackets RADIK for types 22 and 33	200 ÷ 600	Z-U401	●	●	●	●	●	●	●	●	●	●	●	●
Internal stand bracket - universal	300 ÷ 900	Z-U331	●	●	●	●	●	●	●	●	●	●	●	●
Stand Bracket for types 22 and 33	200 ÷ 900	Z-U400	●	●	●	●	●	●	●	●	●	●	●	●
Drill-in bracket 15/120	300 ÷ 900	Z-U140	●	●	●	●	●	●	●	●	●	●	●	●
Drill-in bracket 15/100/70	300 ÷ 900	Z-U141	●	●	●	●	●	●	●	●	●	●	●	●
Drill-in bracket 18/120	300 ÷ 900	Z-U144	●	●	●	●	●	●	●	●	●	●	●	●
Drill-in bracket 18/110/100	300 ÷ 900	Z-U290	●	●	●	●	●	●	●	●	●	●	●	●
Radiator with welded fixing hangers			Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y

Caption:



Can be used
Can not be used



yes
no

* valid for RADIK KLASIK - R



1) is not suitable for RADIK COMBI VK






17




KORAMONT® MOUNTING OF RADIK STEEL PANEL RADIATORS

MOUNTING TEMPLATE



Construction element		Packing unit
Position	Name	Content
1	 Sheet metal 100 (intended for all models except for type 33 VKU)	- 10 pcs Sheet metal 100 mm - 20 pcs Dowel plug 12/60 mm - 20 pcs Washer 8,4 mm - 20 pcs Screw 8 x 60 mm - 1 pcs Ruler - Directions for use
2	 Sheet metal 155 (intended for all models)	- 10 pcs Sheet metal 155 mm - 20 pcs Dowel plug 12/60 mm - 20 pcs Washer 8,4 mm - 20 pcs Screw 8 x 60 mm - 1 pcs Ruler - Directions for use
3	 Joining component G 1/2 internal	- 10 pcs Joining component G 1/2 internal - 10 pcs Bolt M6 with a wing nut - 10 pcs Washer 6,4 mm - Directions for use
4	 Joining component G 3/4 external	- 10 pcs Joining component G 3/4 external - 10 pcs Bolt M6 with a wing nut - 10 pcs Washer 6,4 mm - Directions for use
5	 Ruler for the mounting template	- A part of the packing unit - see position 1, 2 (can be ordered as a spare part)

- universal use for all models and types in VENTIL KOMPAKT, PLAN VENTIL KOMPAKT, RADIK PLAN VERTIKAL - M and RADIK LINE VERTIKAL - M version.
- prevents damage of the surface and theft of radiators during construction
- multiple use of the mounting template
- assembly of the complete heating mains in buildings under construction without the radiators
- enables a pressure test on the heating system in buildings under construction
- fixes the connection pipes during construction work (e.g. concreting the floor)
- connecting pitch of the connection pipes remains the same even during finishing work
- using the ruler and mounting instructions, you make preparation of conditions for installation of any wall brackets easier without the presence of the radiators (measuring, drilling holes or fitting dowel plugs into the wall)
- zinc-coated metal parts

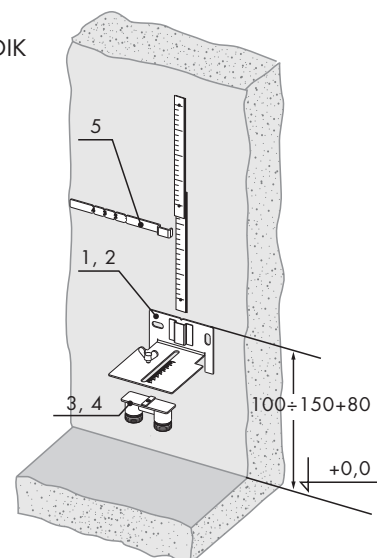

Type	Order number
Sheet metal 100	Z-MS001
Sheet metal 155	Z-MS002
Joining component G 1/2 internal	Z-MS003
Joining component G 3/4 external	Z-MS004
Ruler for the assembly template	Z-ND-010



KORADO, a.s.
Bří Hubálků 869
560 02 Česká Třebová
Czech Republic

e-mail: info@korado.cz
<http://www.korado.com>

